


Grounding/Bonding Lugs

(UL & CUL Listed)

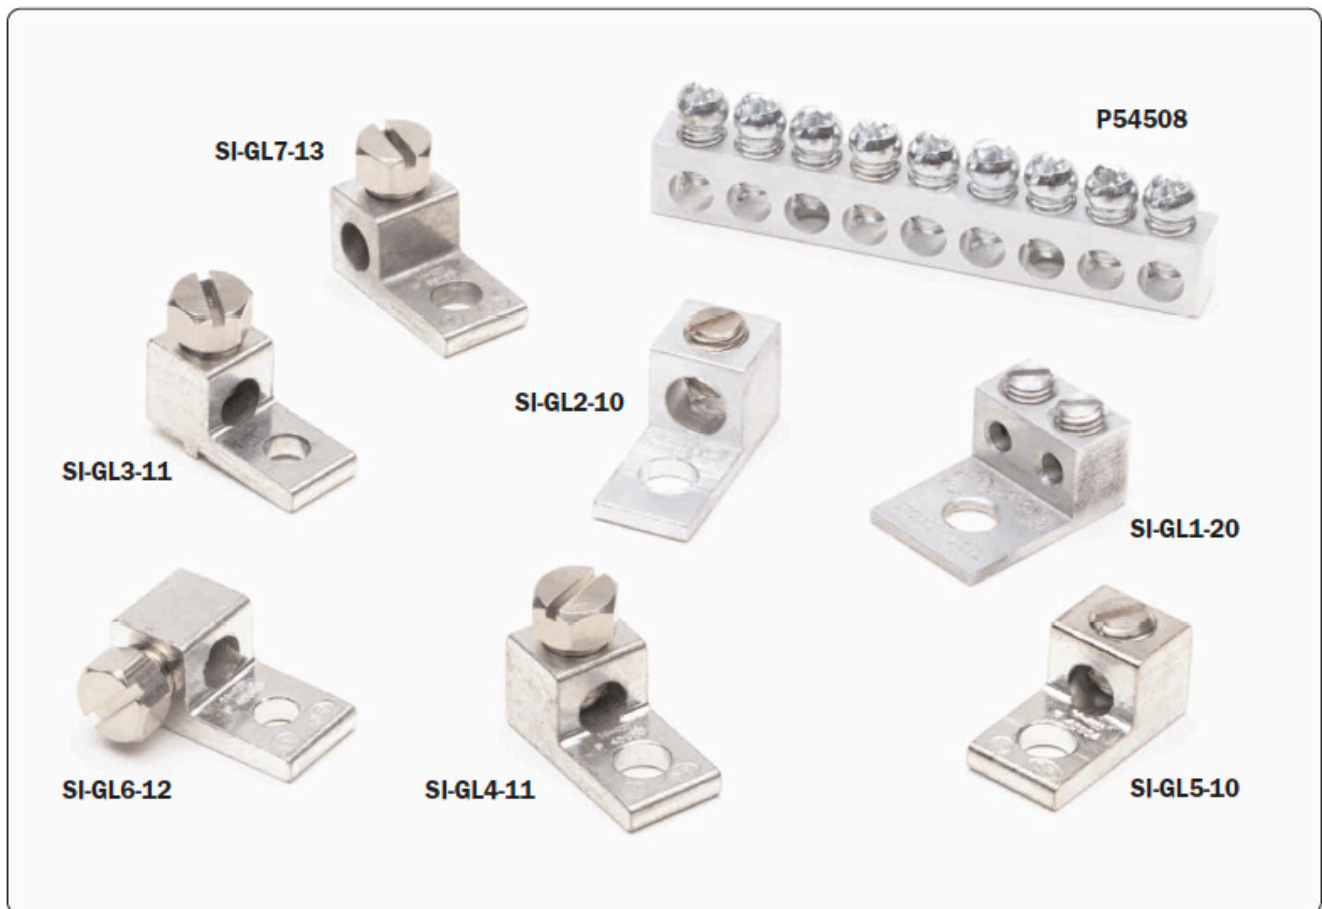

- Body constructed of high strength aluminum or bronze, electro-tin plated
- For mechanically bonding ground wire to equipment or grounding satellite dish installations
- Holes on front or side of grounding lug for attaching ground wire
- Accepts ground wire ranging between 17 - 10 AWG, 14 - 6 AWG or 14 - 4 AWG copper
- Furnished assembled with slotted headless set screw or slotted hex set screw
- Set screw can be tightened with a flat head screwdriver
- Hex set screw can be tightened with a flat head screwdriver or a SI-7195, 3/8 - 7/16" Terminal Wrench
- Mounting hole accommodates a 1/4" or a 3/16" stud
- UL and CUL listed

For technical assistance or to request samples, please call 800-350-1650

MacLean Network Solutions

610 Pond Drive Wood Dale, IL 60191

Phone: 800-350-1650

Email: Sales@macleansenior.com

Website: www.macleannetworksolutions.com

MacLean Network Solutions All rights reserved.

06/1/2022