


| | | | | |
|-------------------------|---|--|---|---|
| 1 | 2 | 3 | 4 | 5 |
| COMPONENT SPECIFICATION | | USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC. | | |

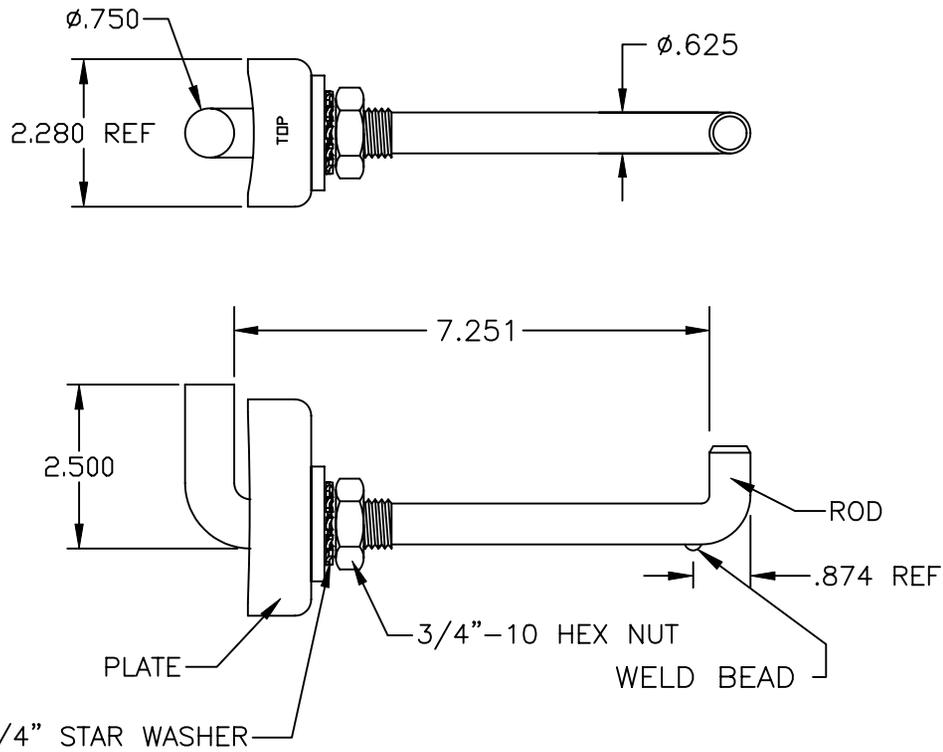

SPECIFICATIONS

POLE RANGE: STEEL - 6.5" TO 10" DIAMETER, .118" - .219" WALL.

STRENGTH: WHILE MOUNTED TO A POLE, THE POLE STEP SHALL:

WITHSTAND 750 LBS DOWN FORCE, APPLIED AT THE END OF THE ROD, WITHOUT FRACTURE, DEGRADATION, OR DISASSEMBLY FROM POLE.*

WITHSTAND 150 LBS UPWARD FORCE, APPLIED UNDERNEATH AT THE END OF THE ROD, WITHOUT FRACTURE, DEGRADATION, OR DISASSEMBLY FROM POLE.*

WITHSTAND 250 LBS SIDE TO SIDE FORCE WITHOUT FRACTURE, DEGRADATION, OR DISASSEMBLY FROM POLE.*

DROP TEST: WHILE MOUNTED TO A POLE, WITHSTANDS A DROP LOAD OF 250 LBS, ATTACHED BY AN 18" CHAIN TO THE END OF THE POLE STEP, WITHOUT FRACTURE, DEGRADATION, OR DISASSEMBLY FROM POLE.*

ASSEMBLY: MOUNTS INTO 13/16" DIAMETER HOLE.

* ONE INCH DEFORMATION ACCEPTABLE, MEASURED AT THE END OF THE POLE STEP.

| | | |
|------|--------------------|-----------------|
| 4 | PLATE/BUSHING ASSY | STAINLESS STEEL |
| 3 | 3/4" STAR WASHER | STAINLESS STEEL |
| 2 | 3/4"-10 HEX NUT | STAINLESS STEEL |
| 1 | ROD | STAINLESS STEEL |
| ITEM | DESCRIPTION | MATERIAL/FINISH |



SENIOR INDUSTRIES, INC.

| | | | | | | | | | | |
|-----------|-----|----------|--------|----------|---------------------------|--------|-------|------------------------|----------|-----------|
| DESIGNED: | | | SYM. | DATE: | DESCRIPTION OF REVISIONS: | DRAWN: | APPD: | TOLERANCE: | PART NO: | SI-0040S |
| DRAWN: | MAW | 03/04/11 | ▲ | 03.04.11 | NEW | MAW | JF | TO 2 DECIMAL PLACE: ± | TITLE: | POLE STEP |
| CHECKED: | MAW | 03/04/11 | ▲ | . | . | | | TO 3 DECIMAL PLACES: ± | SHEET: | 1 OF 1 |
| APPROVED: | JF | 03/04/11 | ▲ | . | . | | | AS ANGLES: ± | | |
| 3RD ANGLE | | UNIT: | inches | SCALE: | | REV. | A | | | |