


1	2	3	4	5
COMPONENT SPECIFICATION		USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.		

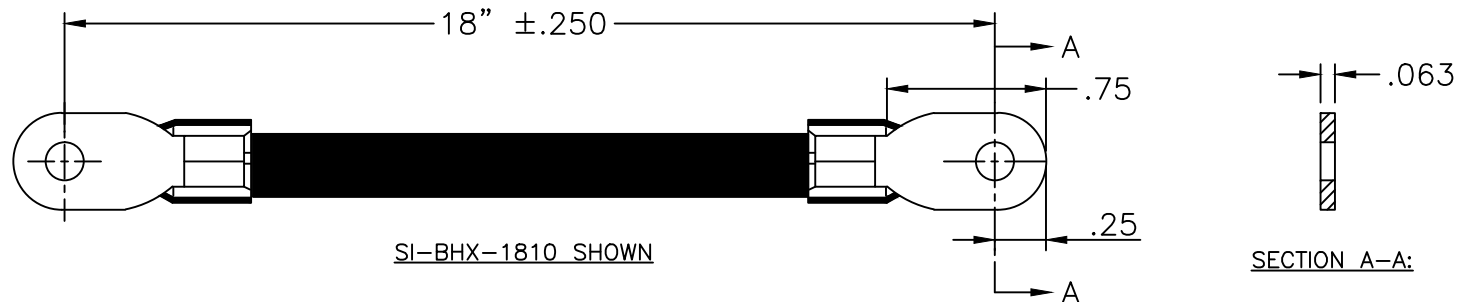

1/4" RING TERMINAL BOTH ENDS (.250")	#10 RING TERMINAL BOTH ENDS (.190")	#8 RING TERMINAL BOTH ENDS (.164")	#6 RING TERMINAL BOTH ENDS (.138")	1/4" RING TERMINAL #10 RING TERMINAL

SPECIFICATIONS:

1. RING TERMINALS, STANDARD MOUNTING HOLE SIZE #10 AND 1/4"
2. ROPE-LAY CABLE, TINNED COPPER STRANDS.
3. RING TERMINAL ON EACH END. MATERIAL: COPPER ALLOY, TIN PLATED.
4. RING TERMINAL ACCOMODATES #6 AWG CABLE.

PART NUMBER BUILDER:

MODEL	CABLE TYPE	LENGTH OF HARNESS IN INCHES	INSULATION	RING TERMINAL MOUNTING HOLE SIZE	COLOR OF INSULATION
SI-BH	□	-	□	□	□
A - #6AWG, 427 STRANDS		6 (STD)	BLANK - INSULATED	6 - #6 RING TERM.	BLANK - BLACK (STD)
B - #6AWG, 665 STRANDS		8	U - UNINSULATED	8 - #8 RING. TERM.	OR - ORANGE
C - #6AWG, 7 STRANDS		11 (STD)		10 - #10 RING TERM.	BL - BLUE
		12		25 - 1/4" RING TERMINAL	BR - BROWN
		15		1025 - 1/4" & #10 RING TERM.	SL - SLATE
		18 (STD)			GR - GREEN
		20			R - RED
		24			
		26			
		30			
		36			



DESIGNED:			SYM. DATE: DESCRIPTION OF REVISIONS:	DRAWN: APPD:	TOLERANCE:	PART NO:	SI-BHX-XXXX
DRAWN:	GAT	05/11/06	▲ 04.25.08 NEW	GAT JF	TO 2 DECIMAL PLACE: ±.015	TITLE:	BONDING HARNESS
CHECKED:	GAT	05/11/06	▲ 09.30.15 Tolerance corrected.	MAW JF			
APPROVED:	JF	05/11/06	▲ . . .		TO 3 DECIMAL PLACES: ±.005	SHEET:	1 OF 1
3RD ANGLE		UNIT: IN	SCALE:	REV: B	AS ANGLES: ±1/2"		