COMPONENT SPECIFICATION	USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

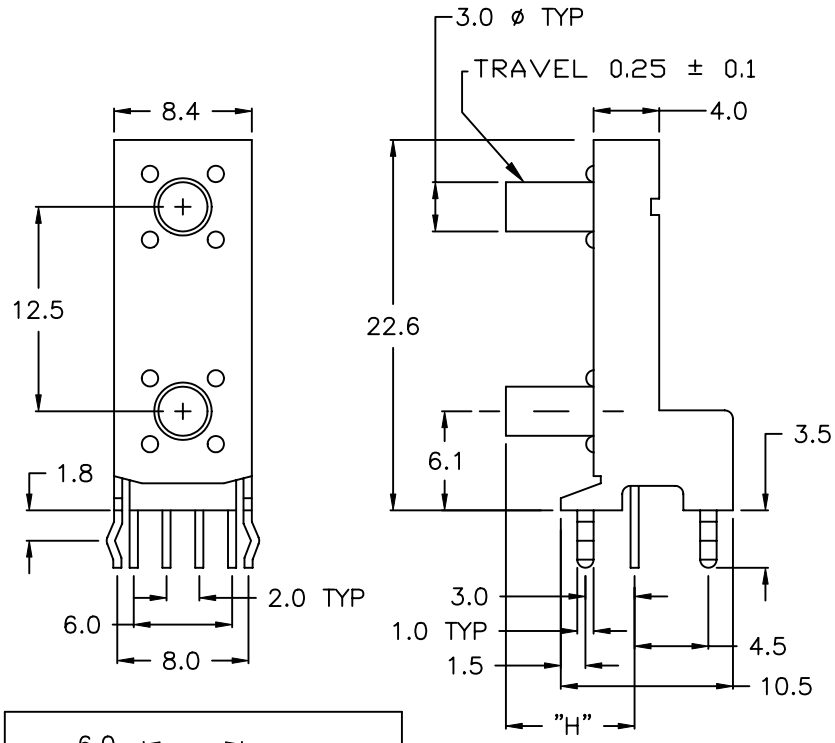

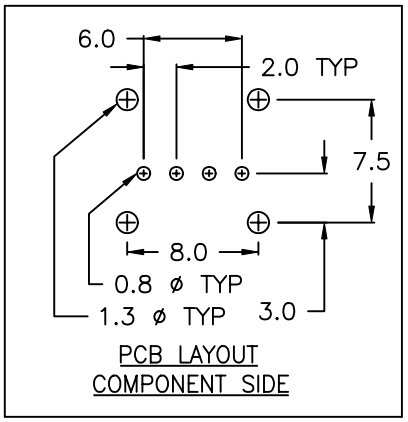



SPECIFICATIONS:

ELECTRICAL:

CONTACT RATING: 50mA @ 12VDC
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 100 MEGOHMS MIN. @ 500VDC
DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE

MECHANICAL:

OPERATING LIFE: 100,000 CYCLES
OPERATING FORCE: SEE TABLE
TRAVEL: 0.25mm

ENVIRONMENTAL:

OPERATING TEMPERATURE: −20°C TO +70°C
STORAGE TEMPERATURE: −30°C TO +80°C

NOTE: 'X's IN PART NUMBER DENOTE OPTIONS PER TABLE.

C	15.85	C	260±30
B	8.35	B	160±30
A	3.85	A	120±30
1st 'X'	H(mm)	2nd 'X'	OPERATING FORCE (gf)

ITEM	DESCRIPTIONs	Q'TY	MATERIAL/FINISH
⑤	FRAME	1	0.4mm STEEL, TIN PLATED
④	HOUSING	1	NYLON 6/6, UL94HB, BLACK
③	ACTUATOR	2	NYLON 6/6, UL94HB, BLACK
②	CONTACT	2	PHOSPHOR BRONZE, SILVER PLATED
①	TERMINAL	2	0.3mm BRASS, SILVER PLATED

SENIOR INDUSTRIES, INC.

			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:
DESIGNED:			A	08.27.97	NEW	TF	
DRAWN:	HV	08/22/97	B	03.14.05	NEW INDEX, CH UL94V-0 W/ UL94HB IN ACTR/HOUSING	GAT	
CHECKED:			C	. .			
APPROVED:			D	. .			
			E	. .			

TOLERANCE:
TO 1 DECIMAL PLACE: ±.3
TO 2 DECIMAL PLACES: ±.12
AS ANGLES: ± °

PART NO: SRT−KRS−0622−XX

TITLE: DUAL TACT SWITCH

SHEET: 1 OF 1

3RD ANGLE	UNIT:	mm	SCALE:	3:1	REV:	B